


Emergency Module

Fixture Module

For facilities with an emergency generator, detects loss of standard building power, makes dedicated emergency fixtures default to 100% bright.

Advantages

With an emergency fixture module installed between the Easylite ILS control loop and the Easylite ballast, your Easylite ILS detects the loss of standard building power, and causes the connected, emergency powered fixture to default to full bright output regardless of control input. This module plugs into the Easylite control cabling connection between the control cable and the ballast, eliminating any line voltage wiring or relays.

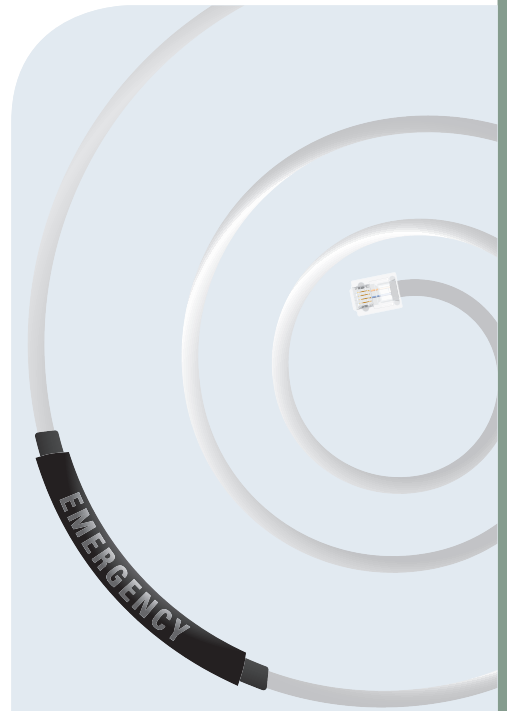

Specifications

Five-Year Warranty
Plug and Play, Ballast power and control

300V insulation
24 AWG four-wire cable
Plenum Rated

Factory terminated with
RJ-11 connectors

Dimensions
3' cable length

Voltage
0-10 Volt DC